
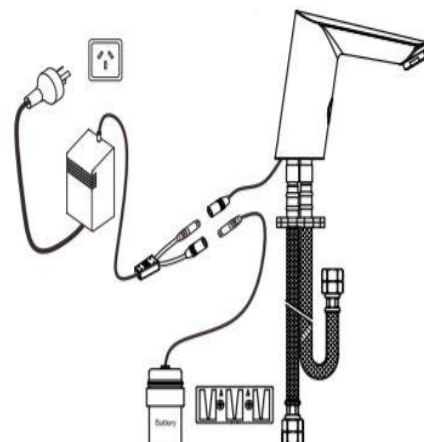
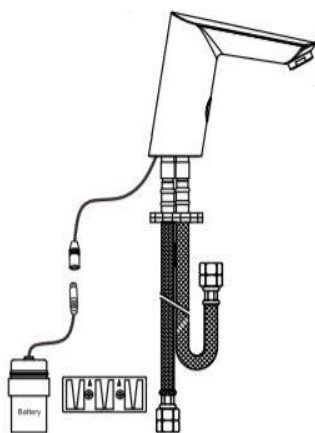


## Specification Summary – ET2-56

- 6 Star WELS
- Watermark
- Highly suitable for Commercial and Domestic use
- Basin mounted
- Built in mixer
- Hot & Cold water feed - no need to pre-mix water
- Hygienic no touch operation
- No fixed run time for maximum water saving
- Confirmation time of 1-2 seconds
- Auto off after 1 minute if sensor obstructed
- Self-adjusting forward-facing sensor
- Manual sensor reset function
- Battery only or mains power with battery back-up
- Water pressure range between 100-500kPa
- Ensure even water pressure for optimum function
- Water Inlet – 15mm ½" G
- Built in scald protection – automatically feeds 5% cold into hot feed for safety
- Ensure supply lines are thoroughly flushed prior to install – tap more susceptible to fine particle debris than a single feed tap
- Water temperature - 1-50°
- Transformer cable (if used) approx. 1M

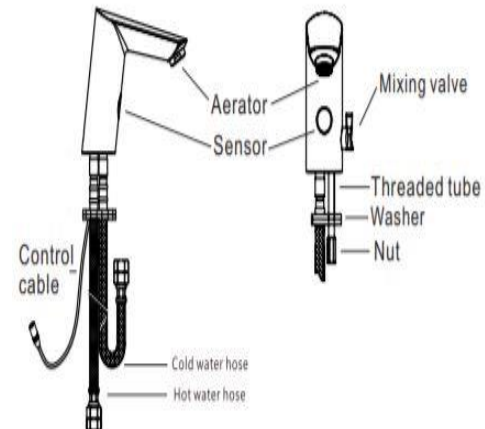

Contact Us:

Australia – 1300 530 883 or [info@enviro-tech.com.au](mailto:info@enviro-tech.com.au)  
 New Zealand – 0800 2 ENVIRO or [info@enviro-tech.co.nz](mailto:info@enviro-tech.co.nz)