


Specification Summary – ET2-OL20

- 6 Star WELS
- Watermark
- Highly suitable for Commercial and Domestic use
- Must be rear fixed – ensure good access
- Hygienic no touch operation
- Sensor sits behind water outlet – ensure correct hand placement for activation
- No fixed run time for maximum water saving
- Confirmation time of 1-2 seconds
- Auto off after 1 minute if sensor obstructed
- Self-adjusting downward facing sensor
- More sensitive to reflective light/shiny surfaces – NOT suitable for use with stainless steel sinks or troughs (Use ET2-20.4 or ET2-SE Sensor Eye instead)
- Install at minimum height of 250mm from sensor to bottom of sink
- Battery only or mains power with battery back-up
- Water pressure range between 100-500kPa
- Water Inlet – 15mm ½" G
- Single water feed – pre-mix water (Mixing valve available to order if required, see ET-HCV)
- Water temperature - 1-50°
- Water hose from rear of spout - approx. 1.3M
- Sensor control cable from rear of spout - approx. 1.5M long (including control box connector lead)
- Transformer cable (if used) approx. 1M





WALL MOUNTED

NOTE: DO NOT FIX THE CABLE.
NOTE: NOT SUITABLE FOR INSTALLATION WITH STAINLESS STEEL BASINS/ENVIRONMENTS.

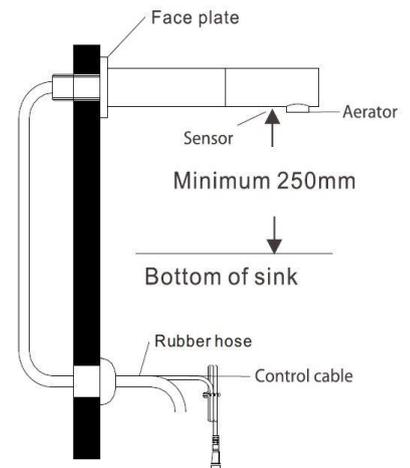

CONTROL BOX

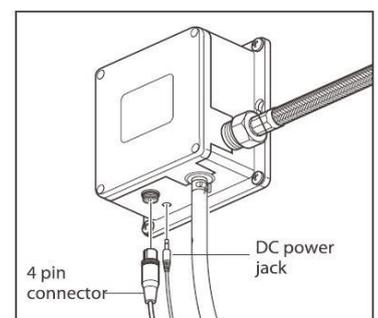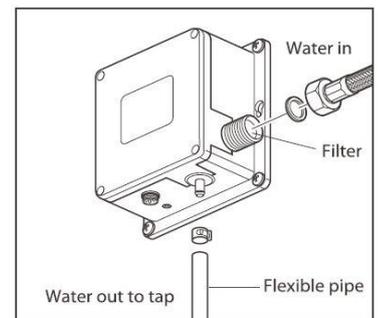

Contact Us:

Australia – 1300 530 883 or info@enviro-tech.com.au
New Zealand – 0800 2 ENVIRO or info@enviro-tech.co.nz