


Specification Summary – ET2-20.4SD

- Highly suitable for Commercial and Domestic use
- Wall Mounted Soap Dispenser
- Hygienic no touch operation
- Rear fixed
- Operate as battery only or mains power with battery back-up (transformer supplied as standard)
- Soap bottle measure – 1.6-2L
- Suitable for free-flowing liquid soap only – viscosity - 100-3500cp (mpA.s)
- Ambient temperature
- Induction distance - 0-8cm
- Quantity of soap dispensed - <2ml per use (on setting 4)
- Run time is adjustable from pump
- Mount soap bottle/pump vertically under sink and ensure good access for filling and maintenance
- Soap hose from rear of spout - approx. 1M
- Sensor control cable from rear of spout - approx. 1.2M long (including pump connector lead)
- Transformer cable approx. 2.5M (including connecting plugs)
- Regular maintenance flushing and cleaning to remove dried and thickened soap is recommended – how often depends on usage and the environment. Performing regular maintenance will enhance pump longevity.

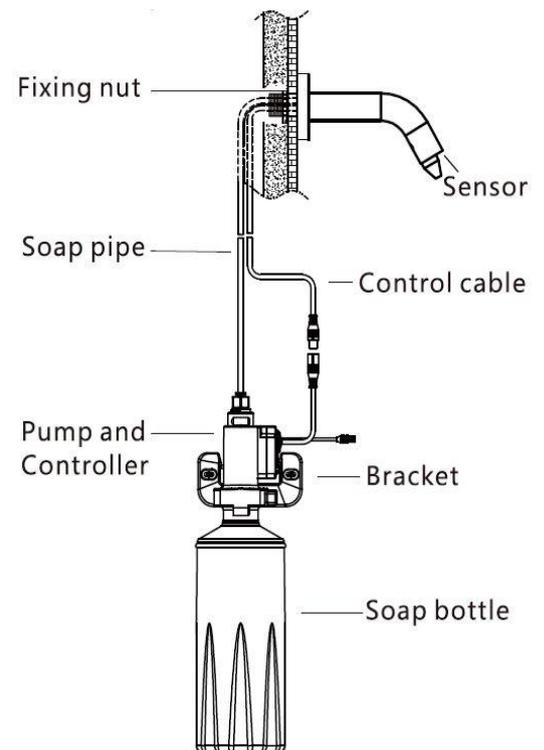

Contact Us:

Australia – 1300 530 883 or info@enviro-tech.com.au
 New Zealand – 0800 2 ENVIRO or info@enviro-tech.co.nz